


# RYLR330

## LoRaWAN® Gateway mini PCIe card

### Datasheet

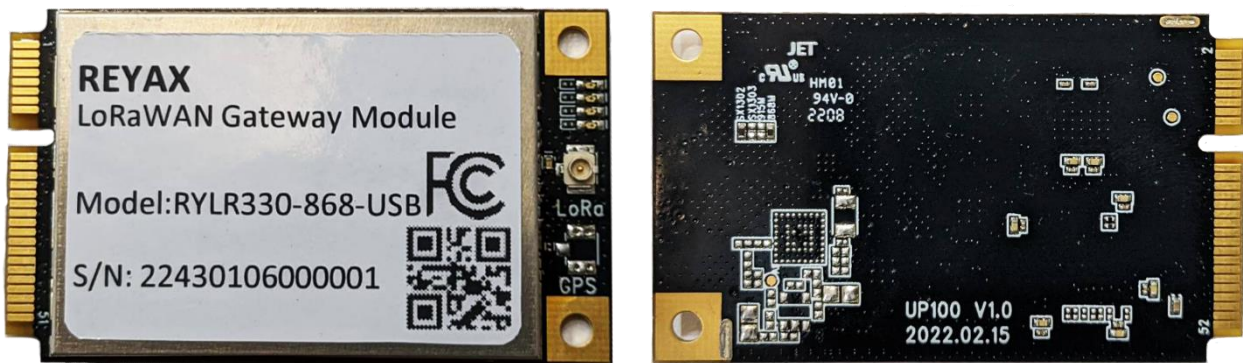

## PRODUCT DESCRIPTION

The RYLR330 is a LoRaWAN® Gateway Module with mini-PCIe form factor based on Semtech SX1302, SX1250 and an option SX1261 (special version) for Listen Before Talk feature, which enables easy integration into an existing router or other network equipment with LPWAN Gateway capabilities. It can be used in any embedded platform offering a free mini-PCIe slot with USB/SPI connection.

This module is a complete and cost-efficient gateway solution offering up to 10 programmable parallel demodulation paths, 8 x 8 channel LoRa® packet detectors, 8 x SF5-SF12 LoRa® demodulators, and 8 x SF5-SF10 LoRa® demodulators. It is capable of detecting an uninterrupted combination of packets at 8 different spreading factors and 10 channels with continuous demodulation of up to 16 packets. This product is best for smart metering fixed networks and internet-of-Things (IoT) applications.

## FEATURES

- Designed based on mini-PCIe form factor 30mm x 59.95mm
- SX1302 baseband processor emulates 8 x 8 channel LoRa® packet detectors, 8 x SF5-SF12 LoRa® demodulators, 8 x SF5-SF10 LoRa® demodulators, one 125/250/500 KHz high-speed LoRa® demodulator, and one (G)FSK demodulator
- Tx power up to 26dBm, Rx sensitivity down to -139dBm@SF12, BW 125KHz
- Supports global license-free frequency band (US915, AS923, AU915, KR920, IN865, EU868)
- Supports optional USB/SPI interfaces
- Support Listen Before Talk (special version)


## APPLICATIONS

- IoT Applications
- Mobile Equipment
- Home Security
- Industrial Monitoring and Control Equipment

## CERTIFICATION

- FCC

## PIN DESCRIPTION

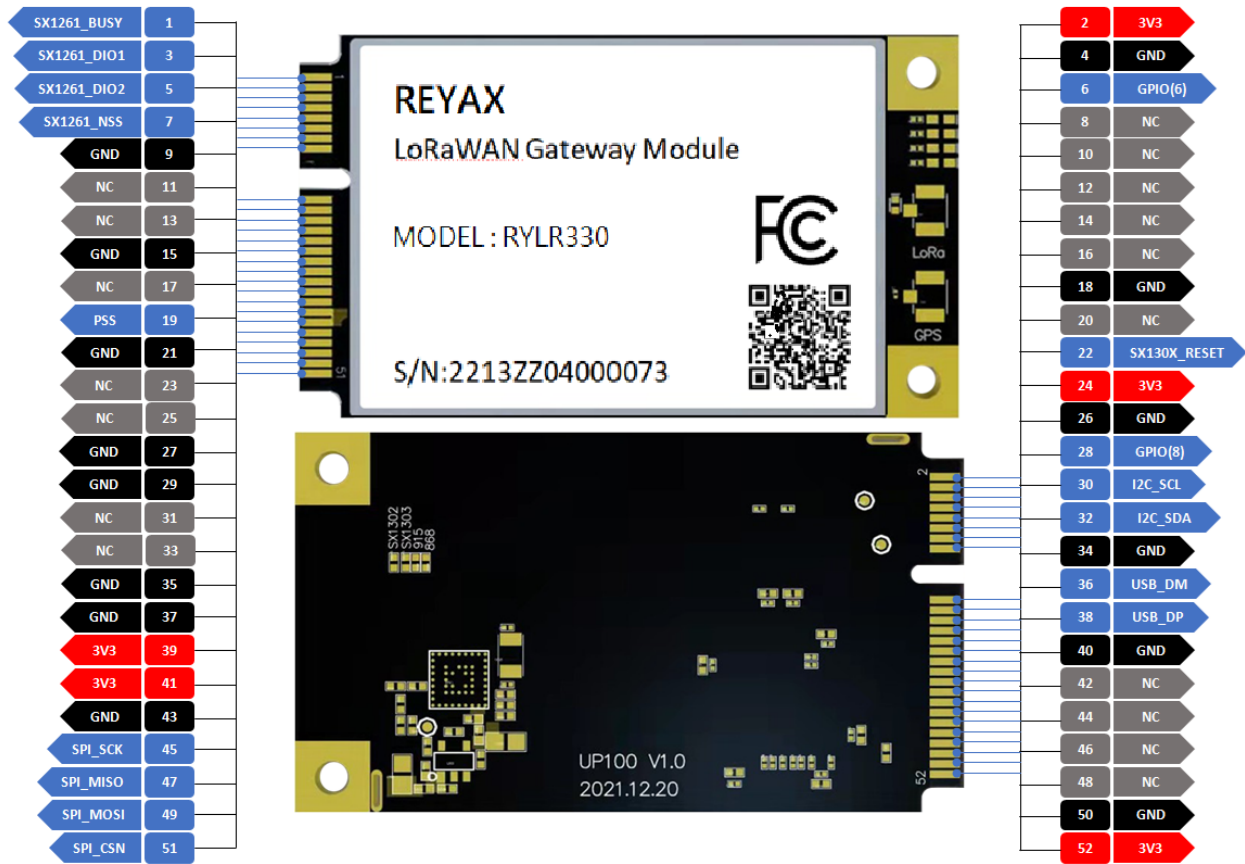


Pin	Name	I/O	Description
1	SX1261_BUSY	DO	No connection by default
2	3V3	PI	3.3V DC supply
3	SX1261_DIO1	IO	No connection by default
4	GND		Ground
5	SX1261_DIO2	IO	No connection by default
6	GPIO(6)	IO	No connection by default
7	SX1261_NSS	DI	No connection by default
8	NC		No connection
9	GND		Ground
10	NC		No connection

11	NC		No connection
12	NC		No connection
13	NC		No connection
14	NC		No connection
15	GND		Ground
16	NC		No connection
17	NC		No connection
18	GND		Ground
19	NC		No connection
20	NC		No connection
21	GND		Ground
22	SX1302_RESET	DI	SX1302_RESET
23	NC		No connection
24	3V3	PI	3.3V DC supply
25	NC		No connection
26	GND		Ground
27	GND		Ground
28	GPIO(8)		No connection by default
29	GND		Ground
30	ISC_SCL	IO	HOST SCL
31	NC		No connection
32	I2C_SDA	IO	HOST SDA
33	NC		No connection
34	GND		Ground
35	GND		Ground
36	USB_DM	IO	USB differential data (-)
37	GND		Ground
38	USB_DP	IO	USB differential data (+)
39	3V3	PI	3.3V DC supply
40	GND		Ground

41	3V3	PI	3.3V DC supply
42	NC		No connection
43	GND		Ground
44	NC		No connection
45	SPI_SCK	IO	No connection by default
46	NC		No connection
47	SPI_MISO	IO	No connection by default
48	NC		No connection
49	SPI_MOSI	IO	No connection by default
50	GND		Ground
51	SPI_CSN	IO	No connection by default
52	3V3	PI	3.3V DC supply

## BLOCK DIAGRAM

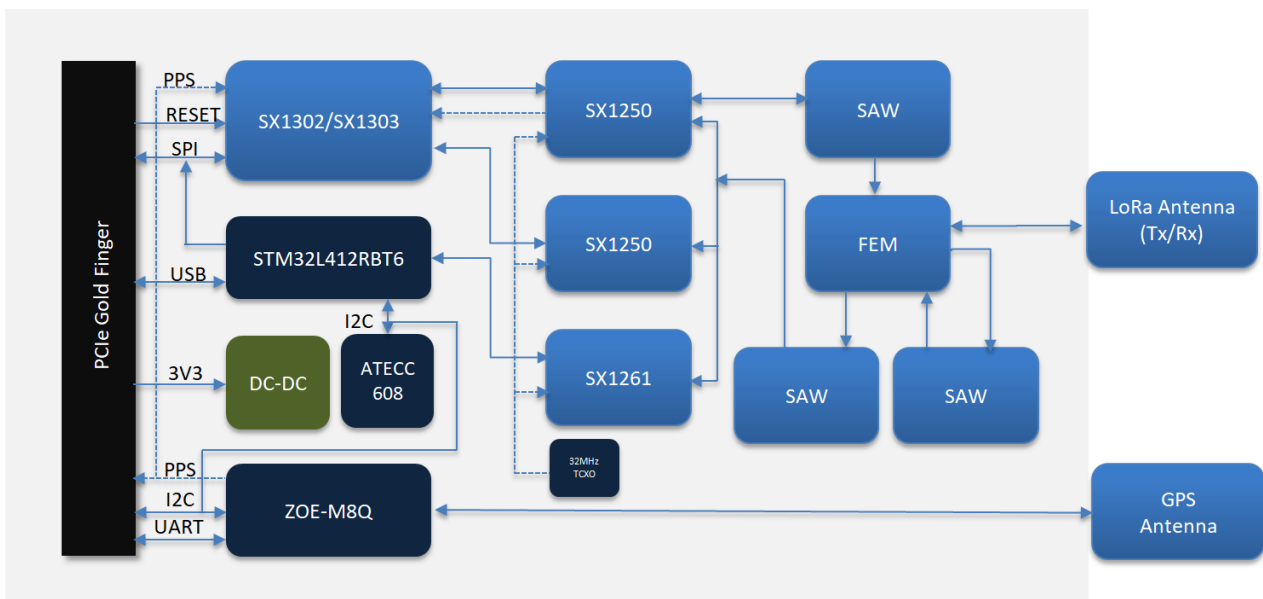

The RYLR330 LoRaWAN® gateway module is equipped with one SX1302 chip and two SX1250s. The first chip is utilized for the RF signal and the core of the device, while the latter provides the related LoRa® modem and processing functionalities. Additional signal conditioning circuitry is implemented for PCI Express Mini Card compliance, and one UFL connectors are available for external antenna integration.

## Hardware

The hardware is categorized into several parts. It discusses the interfacing, pinouts, and its corresponding functions and diagrams. It also covers the parameters and standard values of the board.

## Interfaces

- **Power Supply** – The RYLR330 gateway module must be supplied through the 3V3 pins by a DC power supply. The voltage needs to be stable since the current drawn can vary significantly during operation based on the power consumption profile of the SX1302 chip (for more information, see the SX1302 datasheet).
- **SPI Interface** – SPI interface mainly provides for the HOST\_SCK, HOST\_MISO, HOST\_MOSI, HOST\_CSN pins of the system connector. The SPI interface gives access to the configuration register of SX1302 via a synchronous full-duplex protocol. Only the slave side is implemented.
- **USB Interface** – The USB interface mainly provides for the USB\_D+, USB\_D- pins of the system connector. The USB interface gives the access the configuration register of SX1302 via an MCU STM32L412. Only the slave side is implemented.
- **RESET** – RYLR330 SPI card includes the RESET active-high input signal to reset the radio operations as specified by the SX1302 Specification. RYLR330 USB card's RESET is controlled by MCU.
- **Antenna RF Interface** – The module have one RF interface over a standard UFL connector with a characteristic impedance of 50Ω. The RF port supports both Tx and Rx, providing the antenna interface.

## OPERATING FREQUENCIES

The board supports the following LoRaWAN® frequency channels, allowing easy configuration while building the firmware from the source code.

Region	Frequency (MHz)
North America	US915
Asia	AS923
Australia	AU915
Korea	KR920
Europe	EU868
India	IN865

## RF CHARACTERISTICS

The following table gives typically sensitivity level of the RYLR330 gateway module.

Signal bandwidth (KHz)	Spreading factor	Sensitivity (dBm)
125	12	-139
125	7	-125
250	12	-136
250	7	-123
500	12	-134
500	7	-120

## Electrical Requirements

Stressing the device above one or more of the ratings listed in the Absolute Maximum Rating section may cause permanent damage. These are stress ratings only. Operating the module at these or any conditions other than those specified in the Operating Conditions sections of the specification should be avoided. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

The operating condition range defines those limits within which the functionality of the device is guaranteed. Where application information is given, it is advisory only and does not form part of the specification.

## Absolute Maximum Rating

The limiting values given below are following the Absolute Maximum Rating System (IEC 134).

Symbol	Description	Condition	Min	Max
3V3	Module supply voltage	Input DC voltage at 3V3 pins	-0.3V	3.6V
USB	USB D+/D- pins	Input DC voltage at USB interface pins		3.6V
RESET	RYLR330 reset pin	Input DC voltage at RESET input pin	-0.3V	3.6V
SPI	SPI interface	Input DC voltage at SPI interface pin	-0.3V	3.6V
GPS_PPS	GPS PPS input	Input DC voltage at GPS_PPS input pin	-0.3V	3.6V
Tstg	Storage temperature		-40 °C	85 °C

### WARNING:

The product is not protected against overvoltage or reversed voltages. If necessary, voltage spikes exceeding the power supply voltage specification, given in table above, must be limited to values within the specified boundaries by using appropriate protection devices

## Maximum ESD

Parameter	Min	Typical	Max	Remarks
ESD_HBM			1000V	Charged Device Model JESD22-C101 CLASS III
ESD_CDM			1000V	Charged Device Model JESD22-C101 CLASS III

### NOTE:

Although this module is designed to be as robust as possible, electrostatic discharge (ESD) can damage this module. This module must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.

## Power Consumption

Version	Mode	Condition	Max
SPI Version	Active mode (TX)	The power of the TX channel is 26dBm and 3.3V supply.	410mA
	Active mode (RX)	TX disabled and RX enabled	45mA
USB Version	Active mode (TX)	The power of the TX channel is 26dBm and 3.3V supply.	443mA
	Active mode (RX)	TX disabled and RX enabled	60mA

## Power Supply Range

Input voltage at 3V3 must be above the normal operating range minimum limit to switch on the module.

Symbol	Parameter	Min	Typical	Max
3V3	Module supply operating input voltage	3V	3.3V	3.6V



## ORDER INFORMATION

Ordering No.	Interface	Band
RYLR330-915-USB	USB	US915 、 AS923 、 AU915 、 KR920
RYLR330-915-SPI	SPI	US915 、 AS923 、 AU915 、 KR920
RYLR330-868-USB	USB	EU868 、 IN865
RYLR330-868-SPI	SPI	EU868 、 IN865



**E-mail** : [sales@reyax.com](mailto:sales@reyax.com)  
**Website** : <http://reyax.com>